



You can view this report online at : <https://www.hackerrank.com/x/tests/864906/candidates/18917190/report>

Full Name: *****

Email: *****

Test Name: talegri - developer auction test

Taken On: 6 Nov 2020 14:30:34 CET

Time Taken: 60 min/ 60 min

Invited by: Urs

Invited on: 6 Nov 2020 14:19:29 CET

Skills Score:

- Problem Solving (Basic) 50/50
- Problem Solving (Intermediate) 69/75
- SQL (Basic) 50/50

Tags Score:

- Algorithms 69/75
- Arrays 119/125
- Binary Search 69/75
- Data Structures 69/75
- Easy 100/100
- Interviewer Guidelines 100/100
- Loops 50/50
- Medium 69/75
- Problem Solving 119/125
- SQL 50/50
- Simple Joins 50/50
- Theme: Finance 69/75

96.6%

169/175

scored in **talegri - developer auction test** in 60 min on 6 Nov 2020 14:30:34 CET

Recruiter/Team Comments:

No Comments.

	Question Description	Time Taken	Score	Status
Q1	Growth in 2 Dimensions > Coding	27 min 6 sec	50/ 50	✓
Q2	Youngest Employees > DbRank	5 min 55 sec	50/ 50	✓
Q3	Profit Targets > Coding	27 min 14 sec	69/ 75	⚠

QUESTION 1

Correct Answer

Growth in 2 Dimensions > Coding

Easy Loops Problem Solving Arrays

Interviewer Guidelines


QUESTION DESCRIPTION

Start with an infinite two dimensional grid filled with zeros, indexed from $(1, 1)$ at the bottom left corner with coordinates increasing toward the top and right. Given a series of coordinates (r, c) , where r is the ending row and c is the ending column, add 1 to each element in the range from $(1, 1)$ to (r, c) inclusive. Once all coordinates are processed, determine how many cells contain the maximal value in the grid.

Example

`upRight = ["1 4", "2 3", "4 1"]`

The two space-separated integers within each string represent r and c respectively. The following diagrams show each iteration starting at zero. The maximal value in the grid is 3, and there is 1 occurrence at cell $(1, 1)$.

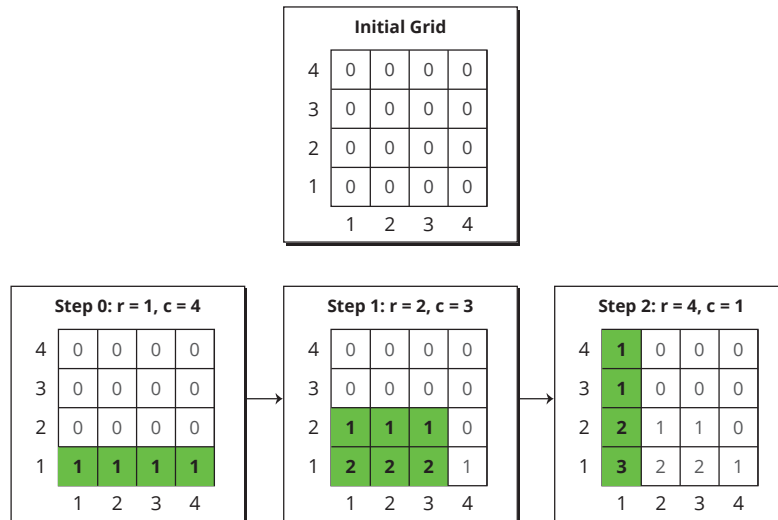

Function Description

Complete the function `countMax` in the editor below.

`countMax` has the following parameter(s):

`string upRight[n]`: an array of strings made of two space-separated integers, r and c .

Return

`long`: the number of occurrences of the final grid's maximal element

Constraints

- $1 \leq n \leq 100$
- $1 \leq \text{number of rows, number of columns} \leq 10^6$

▼ Input Format for Custom Testing

Input from stdin will be processed as follows and passed to the function.

The first line contains an integer n , the size of the array `upRight`.

Each of the next n lines contains a string of two space-separated integers representing coordinates r and c for element `upRight[i]`.

▼ Sample Case 0

Sample Input

```
STDIN      Function
-----
3         →   upRight[] size n = 3
2 3      →   upRight = ['2 3', '3 7', '4 1']
```


3 7
4 1

Sample Output

2

Explanation

Given $upRight = ["2\ 3", "3\ 7", "4\ 1"]$:

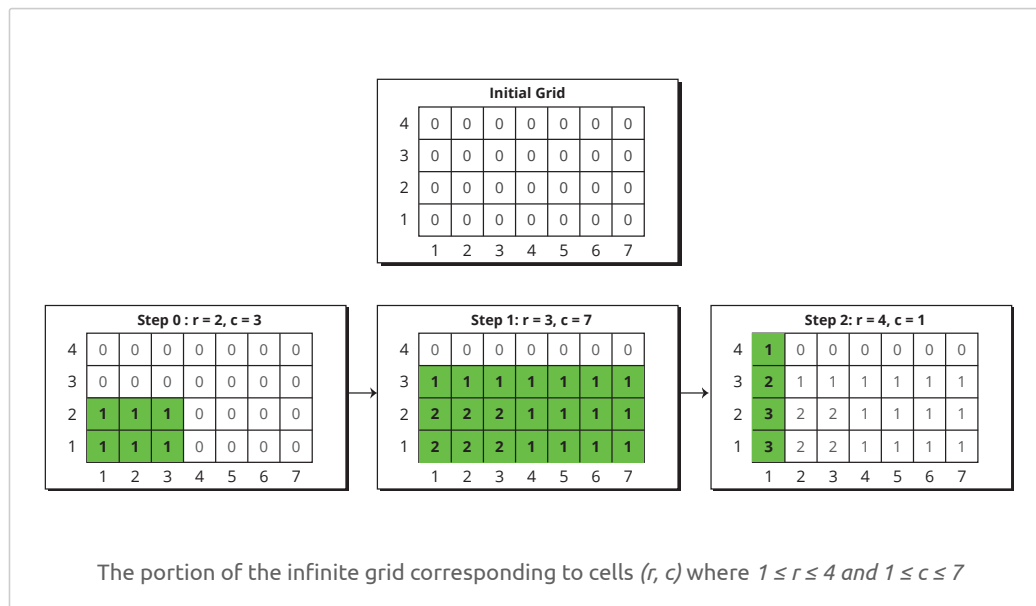

After processing all $n = 3$ coordinate pairs, the maximum value in any cell is 3. Because there are two such cells with this maximal value, return 2 as the answer.

INTERVIEWER GUIDELINES

▼ Hint 1

Since number of rows and columns is of the order of 10^6 , the construction of the matrix is impossible. Calculate the answer using rows and columns separately.

▼ Hint 2

Use difference array to update the range $[1, row]$ and $[1, column]$ in each operation.

▼ Solution

Concepts Covered: Basic Programming Skills, Loops, Arrays, Prefix sums, Counting, Problem Solving. The problem tests the candidate's ability to use loops, array handling, and the difference arrays. It requires the candidate to come up with an algorithm to find the number of cells with the maximum value after a series of range submatrix updates in a constrained time and space complexity.

Optimal Solution: We don't need to construct the whole matrix since it would not fit into the required space complexity.

Since for a particular operation, the whole submatrix from $(1, 1)$ to (r, c) is updated by 1, we can calculate the number of times each row and column is updated. This can be done using difference array, which allows $O(1)$ update over a range $[l, r]$.

So let $rows[]$ and $columns[]$ be the two arrays of size = mx (where $mx = 10^6$ the maximum number of rows and columns possible), which denote that how many times a particular row or column, represented by $rows[i]$ and $columns[i]$ is updated.

Let (r, c) be the current operation. We can do the following:

$rows[1]++$, $rows[r + 1]--$

$cols[1]++$, $cols[c + 1]--$

col[i]++, col[i + 1]--

Finally we must take a prefix sum from left to right for each rows[] and columns[].

So to find the number of cells with the maximum number(max), we can calculate cnt_row and cnt_col.

cnt_row = The number of cells i, in rows[i] such that rows[i] = max

cnt_col = The number of cells i, in columns[i] such that columns[i] = max

So the answer = cnt_row * cnt_col.

Time Complexity: O(max(row, column)).

```
def countMax(upRight):
    n = len(upRight)
    # initialize arrays with zeros
    # size is fixed by constraints
    row = [0] * 1000005
    col = [0] * 1000005
    for i in range(n):
        # get the indices per query
        li = upRight[i].split(" ")
        # update appropriate rows and columns
        # for ranges where operations occur
        row[1] += 1
        row[int(li[0]) + 1] -= 1
        col[1] += 1
        col[int(li[1]) + 1] -= 1
    # calculate prefix sums by row and by column
    # while discovering the global maximum value
    sum1 = 0
    sum2 = 0
    mx = 0
    for i in range(1000005):
        sum1 += row[i]
        row[i] = sum1
        sum2 += col[i]
        col[i] = sum2
        mx = max(mx, row[i])
        mx = max(mx, col[i])
    # count the number of cells matching the global maximum
    cnt1 = 0
    cnt2 = 0
    for i in range(1000005):
        if(row[i] == mx):
            cnt1 += 1
        if(col[i] == mx):
            cnt2 += 1

    return cnt1 * cnt2
```

Brute Force Approach: Construct a matrix with the maximum possible rows and columns. For each query, update the whole submatrix from (1, 1) to (r, c) in $O(n^2)$ complexity. After all the updates, find the number of cells in the matrix with the maximum value by iterating through the whole matrix.

Time Complexity: $O(\text{rows} * \text{columns} * k)$, where the matrix has dimensions rows * columns, and k is the total number of operations.

Error Handling:

1. While updating the rows and columns, for implementing difference array trick, to update the range [l, r], its necessary to increment the index (r + 1) by 1 and not index r.
2. To count the value at each row and column index a prefix sum of both the difference arrays must be taken.
3. Since the maximum number of rows and columns is 10^6 , so candidates must be careful to declare the row and column count array as the maximum size only and not less than that.

▼ Complexity Analysis

Time Complexity - $O(mx)$, where $mx = 10^6$, the number of rows and columns possible.
Space Complexity - $O(mx)$.

▼ Follow up Question

Let's suppose we need now to count the number of cells in the matrix which have the minimum non-zero value.

Solution: We now count `cnt_row` and `cnt_col`, which denotes the number of rows and columns with `value = min`.

Psuedo Code -

```
def countMax(upRight):
    # Write your code here
    n = len(upRight)
    row = [0] * 1000005
    col = [0] * 1000005
    for i in range(n):
        li = upRight[i].split(" ")
        row[1] += 1
        row[int(li[0]) + 1] -= 1
        col[1] += 1
        col[int(li[1]) + 1] -= 1
    sum1 = 0
    sum2 = 0
    mn = 100000000
    for i in range(1000005):
        sum1 += row[i]
        row[i] = sum1
        sum2 += col[i]
        col[i] = sum2
        mn = min(mn, row[i])
        mn = min(mn, col[i])

    cnt1 = 0
    cnt2 = 0
    for i in range(1000005):
        if(row[i] == mn):
            cnt1 += 1
        if(col[i] == mn):
            cnt2 += 1

    return cnt1 * cnt2
```

▼ Follow up Question

Let's suppose now you are given queries `Q`, where you need to count the number of cells having `value = Q[i]`.

Solution: After calculating `rows[]` and `columns[]`, maintain two frequency arrays that denote the number of rows and columns which were updated `freq[i]` times.

So the solution to each query is `ans[Q[i]] = freq_row[Q[i]] * freq_col[Q[i]]`.

Psuedo Code -

```
def countMax(upRight, query):
    # Write your code here
    n = len(upRight)
    row = [0] * 1000005
    col = [0] * 1000005
    for i in range(n):
        li = upRight[i].split(" ")
        row[1] += 1
        row[int(li[0]) + 1] -= 1
```

```

row[li[0]] += 1
col[1] += 1
col[int(li[1]) + 1] -= 1
sum1 = 0
sum2 = 0
mn = 100000000
freq_row = [0] * (n + 1)
freq_col = [0] * (n + 1)
for i in range(1000005):
    sum1 += row[i]
    row[i] = sum1
    sum2 += col[i]
    col[i] = sum2
    freq_row[row[i]]++
    freq_col[col[i]]++

ans = [0] * len(query)
for i in range(len(query)):
    ans[i] = freq_row[query[i]] * freq_col[query[i]]

return ans

```

CANDIDATE ANSWER

Language used: Java 8

```

1 class Result {
2
3     /*
4      * Complete the 'countMax' function below.
5      *
6      * The function is expected to return a LONG_INTEGER.
7      * The function accepts STRING_ARRAY upRight as parameter.
8      */
9
10    public static long countMax(List<String> upRight) {
11        long minRow = Long.MAX_VALUE;
12        long minCol = Long.MAX_VALUE;
13        for (String str: upRight) {
14            long row = Long.parseLong(str.split(" ")[0]);
15            long col = Long.parseLong(str.split(" ")[1]);
16            minRow = Math.min(minRow, row);
17            minCol = Math.min(minCol, col);
18        }
19        return minRow * minCol;
20    }
21 }
22 }
23
24

```

TESTCASE	DIFFICULTY	TYPE	STATUS	SCORE	TIME TAKEN	MEMORY USED
Testcase 0	Easy	Sample case	✔ Success	1	0.1372 sec	29.8 KB
Testcase 1	Easy	Sample case	✔ Success	5	0.1614 sec	29.8 KB
Testcase 2	Easy	Sample case	✔ Success	5	0.147 sec	29.9 KB
Testcase 3	Easy	Sample case	✔ Success	5	0.1683 sec	30 KB
Testcase 4	Easy	Sample case	✔ Success	5	0.1642 sec	29.7 KB

Testcase 5	Easy	Hidden case	✔ Success	5	0.1426 sec	29.9 KB
Testcase 6	Easy	Hidden case	✔ Success	5	0.1621 sec	29.9 KB
Testcase 7	Easy	Hidden case	✔ Success	5	0.1388 sec	29.8 KB
Testcase 8	Easy	Hidden case	✔ Success	5	0.1435 sec	29.9 KB
Testcase 9	Easy	Hidden case	✔ Success	5	0.1759 sec	29.4 KB
Testcase 10	Easy	Hidden case	✔ Success	4	0.1346 sec	29.7 KB

No Comments

QUESTION 2



Correct Answer

Score 50

Youngest Employees > DbRank SQL Easy Interviewer Guidelines Simple Joins

QUESTION DESCRIPTION

There are two data tables with employee information: *EMPLOYEE* and *EMPLOYEE_UIN*. Query the tables to generate a list of all employees who are less than 25 years old first in order of *NAME*, then of *ID*, both ascending. The result should include the *UIN* followed by the *NAME*.

Note: While the secondary sort is by *ID*, the result includes *UIN* but not *ID*.

▼ Schema

EMPLOYEE		
Name	Type	Description
ID	Integer	The ID of the employee. This is a primary key.
NAME	String	The name of the employee having [1, 20] characters.
AGE	Integer	The age of the employee.
ADDRESS	String	The address of the employee having [1, 25] characters.
SALARY	Integer	The salary of the employee.

EMPLOYEE_UIN		
Name	Type	Description
ID	Integer	The ID of the employee. This is a primary key.
UIN	String	The unique identification number of the employee.

▼ Sample Data Tables

Sample Input

EMPLOYEE				
ID	NAME	AGE	ADDRESS	SALARY
1	Sherrie	23	Paris	74635
2	Paul	30	Sydney	72167

3	Mary	24	Paris	75299
4	Sam	47	Sydney	46681
5	Dave	22	Texas	11843

EMPLOYEE_UIN	
ID	UIN
1	57520-0440
2	49638-001
3	63550-194
4	68599-6112
5	63868-453

Sample Output

```
63868-453 Dave
63550-194 Mary
57520-0440 Sherrie
```

Explanation

- *Sherrie* is 23 years old and has UIN *57520-0440*. This record is printed.
- *Paul* is 30 years old and has UIN *49638-001*. This record is not printed.
- A similar analysis is done on the remaining records.

None of the three names of people less than 25 years old is repeated, so print them in alphabetical order. There is no additional sorting by *ID* in this case.

INTERVIEWER GUIDELINES

▼ Solution

Concepts covered: e.g. JOIN, ORDER BY

Solution:

Join the tables to get UIN. Filter results to age < 25 and sort ascending by name, id.

```
SELECT eu.uin, e.name
FROM employee e
JOIN employee_uin eu
ON e.id = eu.id
WHERE e.age < 25
ORDER BY e.name, e.id;
```

Note that the secondary sort is on ID but data reported is UIN.

CANDIDATE ANSWER

Language used: **MySQL**

```
1 /*
2 Enter your query here.
3 */
4 select uin, e.name from EMPLOYEE e
```



```
4 select d.dept, c.name from employee c
5 left join EMPLOYEE_UIN d
6 on e.id = d.id
7 where AGE < 25
8 order by NAME ASC;
```

Time taken: **0.03 sec**

No Comments

QUESTION 3



Correct Answer

Score 69

Profit Targets

Coding

Binary Search

Data Structures

Medium

Algorithms

Arrays

Problem Solving

Theme: Finance

QUESTION DESCRIPTION

A financial analyst is responsible for a portfolio of profitable stocks represented in an array. Each item in the array represents the yearly profit of a corresponding stock. The analyst gathers all distinct pairs of stocks that reached the target profit. Distinct pairs are pairs that differ in at least one element. Given the array of profits, find the number of distinct pairs of stocks where the sum of each pair's profits is exactly equal to the target profit.

Example

stocksProfit = [5, 7, 9, 13, 11, 6, 6, 3, 3]

target = 12 profit's target

- There are 4 pairs of stocks that have the sum of their profits equals to the target 12 . Note that because there are two instances of 3 in *stocksProfit* there are two pairs matching (9, 3): *stocksProfits* indices 2 and 7, and indices 2 and 8, but only one can be included.
- There are 3 distinct pairs of stocks: (5, 7), (3, 9), and (6, 6) and the return value is 3.

Function Description

Complete the function *stockPairs* in the editor below.

stockPairs has the following parameter(s):

int stocksProfit[n]: an array of integers representing the stocks profits

target: an integer representing the yearly target profit

Returns:

int: the total number of pairs determined

Constraints

- $1 \leq n \leq 5 \times 10^5$
- $0 \leq stocksProfit[i] \leq 10^9$
- $0 \leq target \leq 5 \times 10^9$

Input Format for Custom Testing

Input from stdin will be processed as follows and passed to the function.

The first line contains an integer *n*, the size of the array *stocksProfit*.

The next *n* lines each contain an element *stocksProfit[i]* where $0 \leq i < n$.

The next line contains an integer *target*, the target value.

Sample Case 0

Sample Input 0

STDIN	Function
-----	-----

```

6      →  stocksProfit[] size n = 6
1      →  stocksProfit = [1, 3, 46, 1, 3, 9]
3
46
1
3
9
47     →  target = 47

```

Sample Output 0

```
1
```

Explanation 0

There are 4 pairs where $stocksProfit[i] + stocksProfit[j] = 47$

1. $(stocksProfit[0] = 1, stocksProfit[2] = 46)$
2. $(stocksProfit[2] = 46, stocksProfit[0] = 1)$
3. $(stocksProfit[2] = 46, stocksProfit[3] = 1)$
4. $(stocksProfit[3] = 1, stocksProfit[2] = 46)$

Since all four pairs contain the same values, there is only 1 *distinct* pair of stocks : (1, 46).

▼ Sample Case 1

Sample Input 1

```

STDIN      Function
-----
7          →  stocksProfit[] size n = 7
6          →  stocksProfit = [6, 6, 3, 9, 3, 5, 1]
6
3
9
3
5
1
12         →  target = 12

```

Sample Output 1

```
2
```

Explanation 1

There are 5 pairs where $stocksProfit[i] + stocksProfit[j] = 12$:

1. $(stocksProfit[0] = 6, stocksProfit[1] = 6)$
2. $(stocksProfit[1] = 6, stocksProfit[0] = 6)$
3. $(stocksProfit[2] = 3, stocksProfit[3] = 9)$
4. $(stocksProfit[3] = 9, stocksProfit[2] = 3)$
5. $(stocksProfit[3] = 9, stocksProfit[4] = 3)$
6. $(stocksProfit[4] = 3, stocksProfit[3] = 9)$

The first 2 pairs are the same, as are the last 4. There are only 2 *distinct* pairs of stocks: (3, 9) and (6, 6).

CANDIDATE ANSWER

Language used: **Java 8**

```

1  class Result {
2
3      /*
4      * Complete the 'stockPairs' function below.
5      *
6      * The function is expected to return an INTEGER.

```

```

7      * The function accepts following parameters:
8      * 1. INTEGER_ARRAY stocksProfit
9      * 2. LONG_INTEGER target
10     */
11
12     public static int stockPairs(List<Integer> stocksProfit, long target) {
13         Set<Integer> set = new HashSet<>();
14         int counter = 0;
15         for (int i: stocksProfit) {
16             if (set.contains(Math.toIntExact(target)-i))
17                 counter++;
18             else
19                 set.add(i);
20         }
21         return counter;
22     }
23 }
24
25 }

```

TESTCASE	DIFFICULTY	TYPE	STATUS	SCORE	TIME TAKEN	MEMORY USED
TestCase 0	Easy	Sample case	✔ Success	1	0.1807 sec	29.6 KB
TestCase 1	Easy	Sample case	✔ Success	1	0.1415 sec	30.3 KB
TestCase 2	Easy	Sample case	✔ Success	1	0.1428 sec	30.1 KB
TestCase 3	Easy	Hidden case	✔ Success	2	0.1839 sec	30.3 KB
TestCase 4	Easy	Hidden case	✘ Wrong Answer	0	0.1427 sec	30 KB
TestCase 5 - O(N^2)	Easy	Sample case	✘ Wrong Answer	0	0.164 sec	30.3 KB
TestCase 6 - O(N^2)	Easy	Hidden case	✘ Wrong Answer	0	0.1556 sec	31 KB
TestCase 7 - O(N^2)	Easy	Hidden case	✔ Success	2	0.1576 sec	31.3 KB
TestCase 8 - O(N^2)	Medium	Hidden case	✔ Success	4	0.2202 sec	35.8 KB
TestCase 9 - O(N^2)	Medium	Hidden case	✔ Success	4	0.1929 sec	31.8 KB
TestCase 10 - O(N^2)	Medium	Hidden case	✔ Success	5	0.2473 sec	40.8 KB
TestCase 11	Medium	Sample case	✔ Success	5	0.2399 sec	41.3 KB
TestCase 12 - O(N^2)	Medium	Hidden case	✔ Success	6	0.1902 sec	37.2 KB
TestCase 14 - O(NlogN)	Hard	Hidden case	✔ Success	19	0.548 sec	56.3 KB
TestCase 16 - O(NlogN)	Hard	Hidden case	✔ Success	19	0.6411 sec	80.5 KB

No Comments